PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶:

(11) International Publication Number:

WO 98/11999

B05D 1/04, B05B 5/14

(43) International Publication Date:

26 March 1998 (26.03.98)

(21) International Application Number:

PCT/F197/00558

A1

(22) International Filing Date:

18 September 1997 (18.09.97)

(30) Priority Data:

963708

19 September 1996 (19.09.96)

(71) Applicant (for all designated States except 1/S): VALMET CORPORATION [FI/FI]; Panuntie 6, FIN-00620 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ILMASTI, Veikko [FI/FI]; Töllinmäki 10 A, FIN-00640 Helsinki (FI). NYBERG, Timo, R. [FI/FI]; Koivuviita 12 B 6, FIN-02130 Espoo (FI).


(74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI). (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

In English translation (filed in Finnish).

(54) Title: PROCEDURE AND APPARATUS FOR TRANSFERRING OF ADDITION TO THE SURFACE OF A MOVABLE MATERIAL WEB

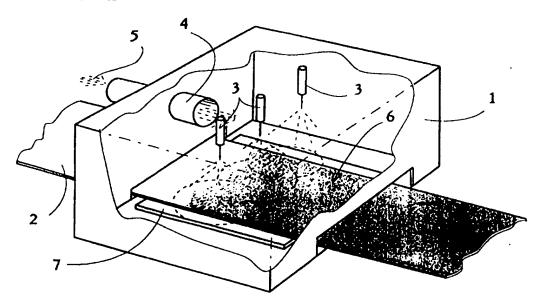

(57) Abstract

A method for transferring in an encapsulated space (1), with the aid of high voltage, additional material (5) onto the surface of a material web (2) moving through the space. The additional material which is added onto the surface of the material web (2) is brought into the housing (1) in a controlled manner in the form of dust or spay (5), for example. The dust or the spray particles are transferred onto the surface of the material web (2) in the encapsulated space (1) by using ion blasting.

0-1--1--

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Amenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	Prance	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ.	Swaziland
AZ.	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	T.J	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
RF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Hulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ.	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nani
CG	Congo	KE	Kenya	NL	Netherlands	YU	
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Yugoslavia Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ.	New Zealand	2.44	7.IIIIDEOWC
CM	Cameroon		Republic of Korea	Pl.	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	l.iecluenste in	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE.	Estonia	LR	Liberia	SG	Singapore		

WO 98/11999 PCT/F197/00558

PROCEDURE AND APPARATUS FOR TRANSFERRING OF ADDITION TO THE SURFACE OF A MOVABLE MATERIAL WEB

5

10

15

20

25

30

35

The object of the invention is a method which is used to transfer, in an encapsulated space and by using high voltage, additional material onto the surface of a material web which moves through the encapsulated space.

One conventional manufacturing process of material is a continuous web formation process. These processes the include milling out of metals to form foil, and the manufacture of plastic and other coatings, films, paper, and cardboard. In addition to its geometric main form (flat and plate-like), many other properties are rendered to the material during the web formation process. One of the most common ways to provide the other properties referred to above is to manipulate the functional surface of the material. This manipulation can be effected either by adding a substance onto the surface of the base material, i.e., by coating, or by changing the properties of the material surface chemically, thermally, mechanically, electrically or in some other way.

In the known methods and devices, material has been transferred onto the surface of the web by spraying or by using a direct contact, such as painting with a brush. In both cases, the amount of transferred material has to be fairly large and, typically, solvents have to be used in the process to accomplish a sufficient mass flow rate. In spray painting, it is known to use an electric charge to advance the transfer of material. In this case, the nozzle of the paint spray constitutes one of the electrodes. This deviates fully from the method now presented in which the electrode is not provided in the nozzle. Furthermore, the voltage levels are different. Solvents are also used to advance the adhesion between the added substance and the web. A drawback then arises that the solvent has to be removed from the process; in the coating of paper, for instance, this implies expensive drying. To improve the printing qualities of the web materials, mainly plastics, a so-called corona charging system is used (less than 50 kV, typically less than 20 kV) in which the surface energy of a polymer film can be increased by using electric discharge. Therefore, the fairly low voltage that is used makes it necessary to use a small gap between the electrodes, making it difficult to control the process. Furthermore, the obtained power remains low because the current cannot be increased limitlessly. To make very thin coatings, so-called PVD technique (Physical Vapour Deposition) can be used but it requires a vacuum and, therefore, does not apply to coating a fast-moving web. Moreover, PVD often requires high temperatures.

10

15

20

30

The purpose of the invention is to eliminate the disadvantages presented above and to provide a new method and a device which can be used to apply additional material easily, quickly, and evenly onto the desired surface of a moving material web. The method according to the invention is characterised in that the additional material which is added onto the surface of the material web is brought into the housing in a controlled manner in the form of dust or spray, for example, and that the dust or the spray particles are transferred onto the surface of the material web in the encapsulated space by using ion blasting.

The device according to the invention is characterised in that the housing is provided with an opening through which the additional material is conveyed to the housing in the form of dust or spray, for example, and that high voltage is supplied to the high-voltage electrodes in the housing, providing ion blasting towards the material web moving through the housing, whereby the additional material in the form of dust or spray in the housing is transferred onto the surface of the material web with the aid of ion blasting.

Different embodiments of the invention are presented in the dependent claims of the array of claims.

The device is very well-adapted to transfer minor amounts of coating, such as a few grams or fractions of a gram per square metre in paper manufacture. Now very small amounts of chemicals can be added onto the surface of paper, for example, improving the operating characteristics of the paper. Up till now, it has been impossible or very difficult to spread small amounts of material evenly, or it has required a great amount of solvent, water or the like which has had to be removed from the paper afterwards.

In paper manufacture in particular, the use of water can be decreased, which is advantageous in many ways. For example, the need for drying is decreased and energy is saved; the amount of circulating water is decreased and the need for cleaning is reduced.

The invention is described in the following with the aid of an example and with reference to the appended drawing in which:

Fig. 1 is an axonometric, partly sectioned view of the device according to the invention, and

Fig. 2 shows the same device as Fig. 1 but as viewed directly from the side and cut open.

5

10

The device consists of housing 1 through which material web 2 moves, additional material being added onto the surface of the web with the aid of electrodes 3 in housing 1. Housing 1 is provided with opening 4 through which the additional materials is conveyed to the housing as indicated by arrow 5. The additional material is in the form of dust or spray, for example. High voltage is supplied to high voltage electrodes 3 in housing 1, providing ion blasting towards material web 2 moving through the housing, whereby the additional material which is in the housing in the form of dust of spray is transferred onto surface 6 of material web 2 with the aid of ion blasting. Electrodes 3 are arranged above material web 2 so that the additional material settles and forms an even surface 6 on the upper surface of material web 2, with the aid of the ion blasting. Below material web 2 in the housing there is provided a plate-like electrode 7, the material web travelling on top of the electrode.

103-1

5

10

25

CLAIMS

- 1. A method for transferring additional material (5) in an encapsulated space (1), with the aid of high voltage, onto the surface of a material web (2) moving through the space, characterised in that the additional material that is added onto the surface of the material web (2) is brought to the housing (1) in a controlled manner in the form of dust or spray (5), for example, and that the dust or the spray particles are transferred onto the surface of the material web (2) in the encapsulated space (1) by using ion blasting.
- 2. A method according to Claim 1, characterised in that the ion blasting is provided by using electrodes (3) in the housing (1), a voltage of more than 50 kV being supplied to the electrodes.
- 3. A device for implementing the method according to the Claim, comprising a housing (1) through which the material web (2) moves, additional material being added onto the surface of the web by using the electrodes (3) in the housing (1), high voltage being supplied to the electrodes, characterised in that the housing (1) is provided with an opening (4) through which the additional material is conveyed to the housing in the form of dust or spray (5), for example, and that high voltage is supplied to the high-voltage electrodes (3) in the housing (1), providing ion blasting towards the material web (2) moving through the housing (1), whereby the additional material in the form of dust or spray in the housing is transferred onto the surface (6) of the material web (2) with the aid of the ion blasting.
 - 4. A device according to Claim 3, characterised in that the electrodes (3) are arranged above the material web (2) so that the additional material settles and forms an even surface (6) on the upper surface of the material web (2) with the aid of the ion blasting.
 - 5. A device according to Claim 3 or 4, characterised in that a plate-like electrode (7) is provided below the material web (2) in the housing (1), the material web travelling on top of the electrode.

WO 98/11999 PCT/FI97/00558

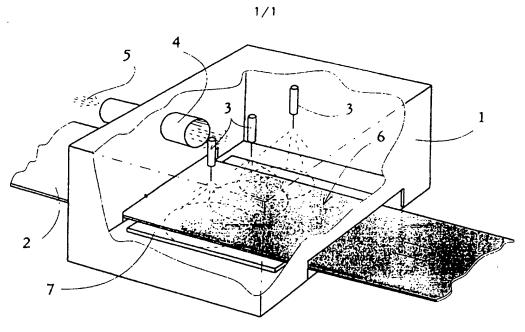


Fig. 1

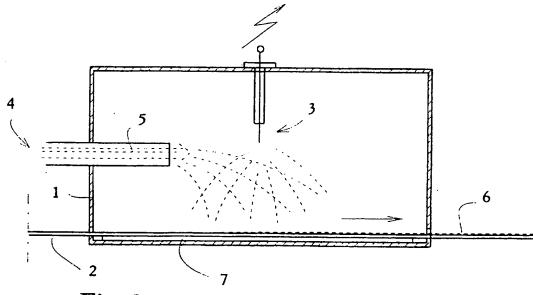


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00558 ' A. CLASSIFICATION OF SUBJECT MATTER IPC6: B05D 1/04, B05B 5/14 According to International Patent Classification (IPC) or to both national classification and IPC **B. FIELDS SEARCHED** Minimum documentation searched (classification system followed by classification symbols) IPC6: B05D, B05B Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched SE, DK, FI, NO classes as above Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) C. DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim No. A GB 2253164 A (HOECHST UK LIMITED), 2 Sept 1992 1-5 (02.09.92)X WO 9611068 A1 (NEXUS CORPORATION), 18 April 1996 1-5 (18.04.96)Α DE 19517229 A1 (GEMA VOLSTATIC AG). 1-5 14 November 1996 (14.11.96), figure 1. abstract A WO 9616745 A1 (OWENS CORNING), 6 June 1996 1-5 (06.06.96)Further documents are listed in the continuation of Box C. χ See patent family annex. Special categories of cited documents: later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "A" document defining the general state of the art which is not considered to be of particular relevance "E" erlier document but published on or after the international filing date "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other step when the document is taken alone special reason (as specified) document of particular relevance: the claimed invention cannot be "O" document referring to an oral disclosure, use, exhibition or other considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document published prior to the international filing date but later than the priority date claimed "&" document member of the same patent family Date of the actual completion of the international search Date of mailing of the international search report 02 -01- 1998 <u>16 December 1997</u> Name and mailing address of the ISA/ Authorized officer Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Johan von Döbeln Facsimile No. +46 8 666 02 86 Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI 97/00558

		PC1/F1 97/0	
C (Continu	ation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the rele	vant passages	Relevant to claim No
A	EP 0435034 A1 (BALL CORPORATION), 3 July 1991 (03.07.91)		1-5
İ			
		İ	
	·		
		-	
1		ļ	
		į	
		İ	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

-- --- ----

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/97

International application No. PCT/FI 97/00558

Patent document cited in search report		Publication date	Patent family member(s)		Publication date		
GB	2253164	A	02/09/92	AT	126431	T	15/09/95
		• •	• • • • • • • • • • • • • • • • • • • •	AU	653989		20/10/94
				AU	1208492		15/09/92
				DE	69204127	D,T	04/04/96
				EP	0526606	A,B	10/02/93
				SE	05 2660 6	T3	
			•	ES	2078036	T	01/12/95
				HU	66848	Α	30/01/95
				HU	9 203652	D	00/00/00
				JP		T	25/11/93
				PL	166928	В	31/07/95
				PL	296624		02/11/93
				US	5470603		28/11/95
				US	5656080		12/08/97
				WO	9214451	A 	03/09/92
WO	9611068	A1	18/04/96	AU	3999895	A	02/05/96
				EP	078 9632		20/08/97
				US	5585426		17/12/96
				ZA	9508403	A	08/05/96
DE	19517229	A1	14/11/96	JP	8299861	Α	19/11/96
WO	9616745	A1	06/06/96	CA	2182391	A	06/06/96
				EP	- 0748258		18/12/96
				US	561 85 89	A	08/04/97
EP	0435034	A1	03/07/91	AU	639046	B	15/07/93
				AU	6688990		04/07/91
				CA	2028369	A	27/06/91
				JP	4271869	A	28/09/92
				MX	168479		26/05/93
				US	5032419	Α	16/07/91

Form PCT/ISA/210 (patent family annex) (July 1992)

04 /04 /0000